

The PS-7000 power supply unit heightened authoritativeness to use high efficiency integrated circuit.
110V or 200V, Single output or Dual output is possible by user selection.

FEATURES

- Stable DC voltage supply
- 2-Wire system
- 110V or 220V optional feature
- Single or Dual output optional feature



SPECIFICATIONS

- ▶ **Output voltage(Current)** : 24V ±2.0%(80mA)
Other user appointment
- ▶ **Accuracy** : 0.2% FS
- ▶ **Repeatability** : 0.2% FS
- ▶ **Temperature drift** : 0.02% FS/°C
- ▶ **Long term drift** : 0.2%per 1000Hr
- ▶ **Ambient temperature & Humidity**
 - Operation : -10~60°C, 10~90%
 - Storage : -20~70°C, 5~95%


- ▶ **Power supply**
 - Voltage : AC 110/220V(50~60Hz)
DC 24V(Optional)
 - Power consumption : Max 4VA
 - Isolation resistance : 100MΩ , DC 500V
(Power-Input)
- ▶ **Etc**
 - Weight : 500g
 - Mounting : Din rail & wall mounted
 - Dimension : 50(W) X 80(H) X 102(D)mm

ORDERING CODE

PS 70		Description
Out Voltage	0	24V (1out)
	1	24V (2out)
	2	12V (1out)
	3	12V (2out)
	4	5V (1out)
	5	5V (2out)
	6	Etc
Power	0	AC 110/220V (50/60HZ)
	1	DC 24V (20~30V)
	2	Etc

TERMINAL DIAGRAM

*POWER SUPPLY

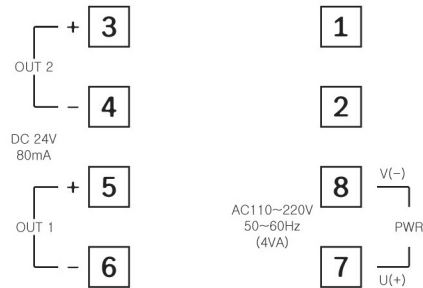

DIMENSION & PANEL CUT

